

7268 Series High Speed Non-Reset Counter

7268 Series is frequently used for position indication on machine tools, back gauges, and laboratory equipment. It's tough enough to be unaffected by punishing industrial environments, yet remains accurate and maintenance-free over a long service life.




- Speeds to 25,000 counts per minute
- High contrast, easy-to-read, 5 figure display
- Direct drive – adds 10 counts per shaft revolution, reverse rotation
- subtracts
- Precision designed mechanism requires only 0.3 oz-in (0.21 N.cm)
- torque
- Rugged construction with brass case and stainless steel shaft
- Permanently lubricated oil impregnated porous bronze bushings
- Available in left and right shaft extension, with clockwise addition or
- subtraction
- Nonreset design provides security of counted totals



TIME



COUNT



MEASURE

8:43

DISPLAY


7268 Series High Speed Non-Reset Counter

ESVR 09082016



SPECIFICATIONS

COUNT SPEED	1500 rpm continuous, 2500 rpm intermittent
TORQUE	Maximum static: 0.3 oz-in (0.21 N.cm)
NUMBER OF FIGURES	5 standard; 3 to 7 available, non-stock
SIZE OF FIGURES	0.187" (4.7 mm) high x 0.140" (3.6 mm) wide
COLOR OF FIGURES	White on black
LUBRICATION	Not required
MOUNTING	Base
OPERATING TEMPERATURE	0° to +131°F (-18° to +55°C)
CONSTRUCTION	Case: Brass Shaft: Stainless steel Pinions: Acetal resin Right Wheel: Nylon, all others acetal resin
WEIGHT	7 oz. (198.45g)

Rotation Diagram



DIMENSIONS

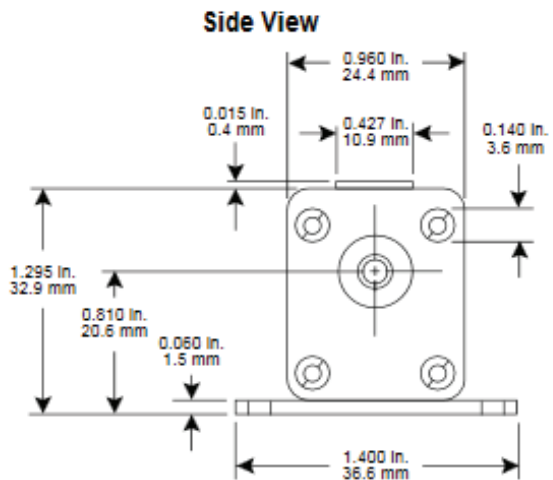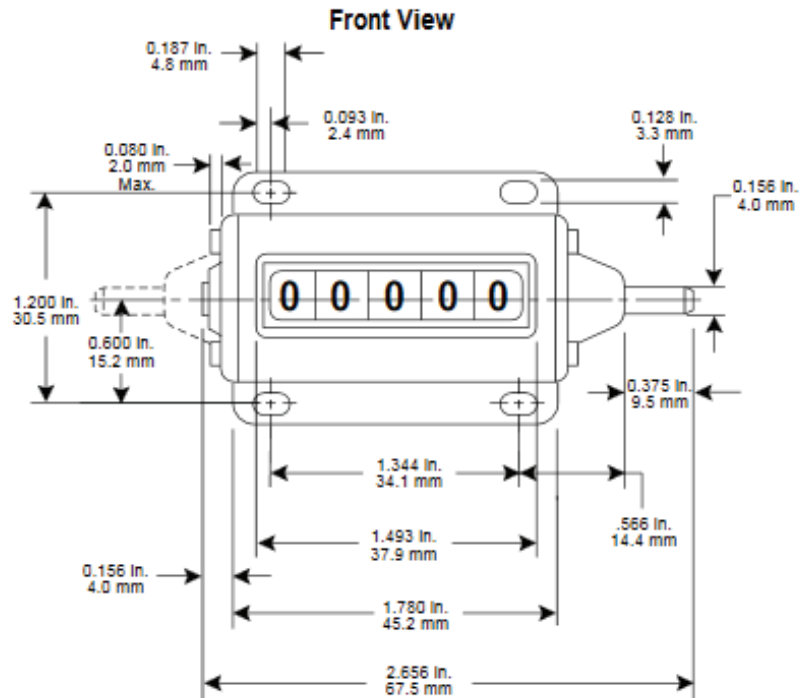

ORDERING INFORMATION

Standard Models

726815-001	Clockwise Rotation, Left Shaft
726825-001	Counterclockwise Rotation, Left Shaft
726835-001	Counterclockwise Rotation, Right Shaft
726845-001	Clockwise Rotation, Right Shaft

Special variations may be available. Please consult factory.